

MICROCEMENT SYSTEMS

Description This document describes the different configurations that Lunik recommends when using its products. It is intended to respond to the needs of both benefits and aesthetics that could occur.

Surface Preparation In all Lunik solutions, it is recommended to properly prepare the surface to be worked on. The support must be free of dust and grease. In the case of concrete, in addition, the support must be firm (minimum tensile strength of 1.5 N/mm²) and dry (maximum humidity allowed 4%).


Types of Applications Three types of solutions are presented with a total of 9 combinations:


- Natural: Composed solely of ONEROCK
- Stone: Composed solely by ONEPOX
- Hybrid: Combination of ONEROCK and ONEPOX

	TYPE 1	TYPE 2	TYPE 3
NATURAL	S	M	L
STONE	S	M	L
HYBRID	S	M	L

MICROCEMENT SYSTEMS

NATURAL

	NATURAL S	NATURAL M	NATURAL L
	VARNISH	VARNISH	VARNISH
	VARNISH	VARNISH	VARNISH
	ONEROCK S	ONEROCK M	ONEROCK L
	ONEROCK L/XL	ONEROCK L/XL	ONEROCK L/XL
	ONEROCK L/XL	ONEROCK L/XL	ONEROCK L/XL
	PRIMER	PRIMER	PRIMER
	YES	NO	NO




- 1** WATERPROOF
- 2** VERY RESISTANT TO IMPACT
- 3** FLEXIBLE
- 4** EASY TO USE
- 5** NO WASTE

MICROCEMENT SYSTEMS

STONE

	STONE S	STONE M	STONE L
	VARNISH	VARNISH	VARNISH
	VARNISH	VARNISH	VARNISH
	ONEPOX S	ONEPOX M	ONEPOX L
	ONEPOX L	ONEPOX L	ONEPOX L
	ONEPOX L	ONEPOX L	ONEPOX L
	PRIMER	PRIMER	PRIMER
	NO	NO	NO

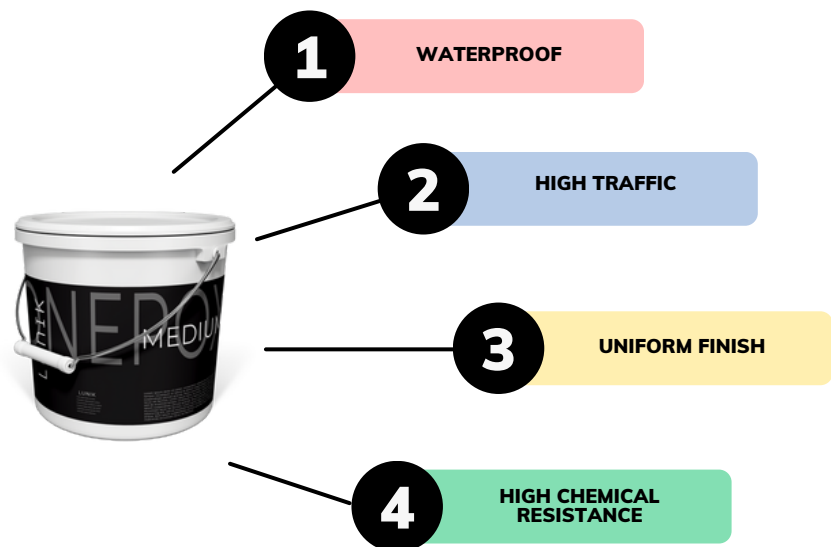

MICROCEMENT SYSTEMS

HYBRID

	HYBRID S	HYBRID M	HYBRID L
	VARNISH	VARNISH	VARNISH
	VARNISH	VARNISH	VARNISH
	ONEPOX S	ONEPOX M	ONEPOX L
	ONEROCK L/XL	ONEROCK L/XL	ONEROCK L/XL
	ONEROCK L/XL	ONEROCK L/XL	ONEROCK L/XL
	PRIMER	PRIMER	PRIMER
	NO	NO	NO



1

WATERPROOF

2

HIGH TRANSIT

3

FLEXIBLE

4

CHEMICAL RESISTANCE

PULSATIA S.L.
 Calle Benifaio, 38.46610 Guadassuar (Valencia)
 Telf. +34 96 116 38 84 hello@lunik.cc

www.lunik.cc 4

The indications and technical data that appear in this brochure are based on our current knowledge and on the most typical uses and applications of the product and are for guidance only, and may be subject to changes and modifications without prior notice. Depending on the conditions of commissioning, in which we have no participation, the specific values may suffer certain variations, as well as normal differences in manufacturing tolerances, tests carried out, etc. For this reason, our guarantee is limited solely to the quality of the product supplied.